



8-1/2" Sliding Compound Mitre Saw
with Laser and LED Light
LS0815FL

High Cutting Capacity

Maximum cutting depth
of 65 mm at 90°



Max cutting
width: 305 mm

Max cutting
height: 65 mm


Laser marker



LS0815FL
only


Bevel range



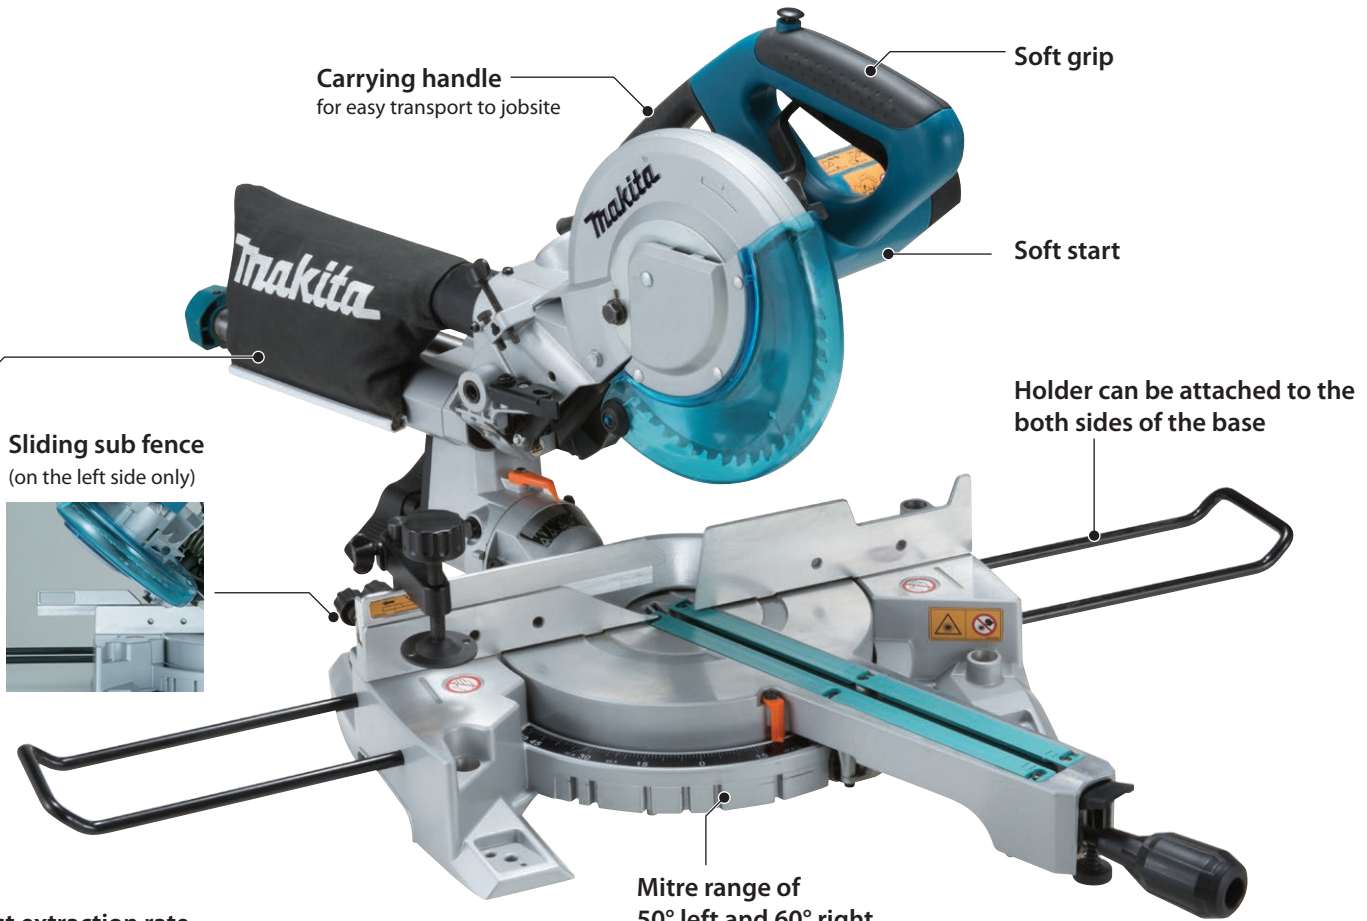


High dust extraction rate

When slide-cutting a 20mm thick Douglas-fir at 90° with a vacuum cleaner connected:

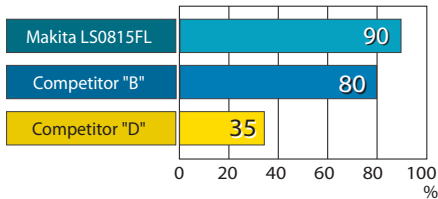

When slide-cutting a 60mm thick Douglas-fir at 90° with a dust bag attached:

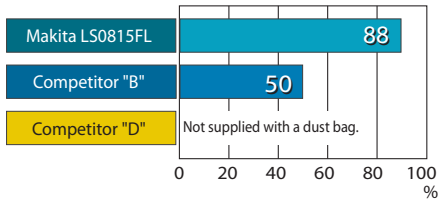


Mitre range of 50° left and 60° right

with positive stops at 0°, 15°, 22.5°, 31.6°, 45° left/right, 50° left and 60° right


Bevel range of 48° left and 5° right

Easy bevel angle change from 45° to 48° left and from 0° (right angle) to 5° right with simple operation of a push-button

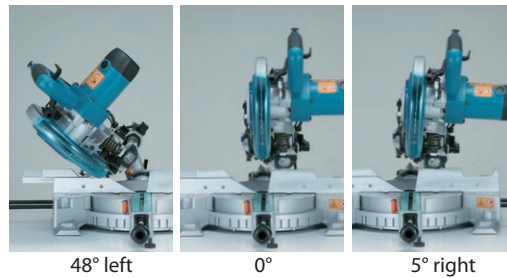

Laser marker

(for LS0815FL only)
Operates on the same power source as the motor; therefore, does not need any battery while Model LS1017L requires two AA batteries.



Cutting capacity

	Bevel Cut at 45° left	Cross Cut
Miter at 0°	50 x 305 mm (2" x 12")	65 x 305 mm (2-9/16" x 12")
Miter at 45°	50 x 215 mm (2" x 8-1/2")	65 x 215 mm (2-9/16" x 8-1/2")
Miter at 60°		65 x 150 mm (2-9/16" x 5-7/8")

8-1/2" Sliding Compound Mitre Saw

LS0815FL 8-1/2" (216mm)

Blade Diameter	8-1/2" (216 mm)
Arbor	5/8" (15.88 mm)
No Load Speed	5,000 RPM
AMPS (120V)	10.5 A
Overall Dimensions (L x W x H)	29-3/4" x 17-3/4" x 19-1/4" (755 mm x 450 mm x 488 mm)

- Double Insulation
- Soft Start
- Bevel Cutting L45 R5
- Laser Marker (LS0815FL Only)
- Dust Collecting
- Built-in Job Light

When QUALITY & SERVICE COUNT – Choose Makita

makita.ca