


NEW!



SIKA BOOM[®]-121 PRO INSULATION INSULATE FOAM

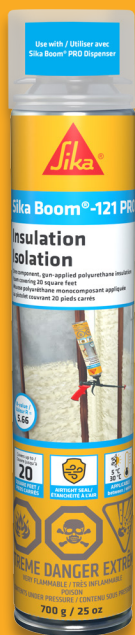

Sika Boom[®]-121 PRO Insulation is a one-component, polyurethane spray foam that provides thermal and sound insulation

ADVANTAGES

- Excellent thermal insulation
- Excellent adhesion to many building materials
- May be applied at temperatures between 5 °C and 30 °C

LEARN MORE



FACT SHEET

Sika Boom® -121 PRO

INSTALLATION GUIDE

Each can has two special plastic nozzles (red tips) for spraying on the wall and on the ceiling (See Picture)



Nozzle A : vertical surface applications

Nozzle B : ceiling applications

- 1** Push the desired nozzle on the Sika Boom® PRO Dispenser gun
- 2** Remove the tab from the top of the Sika Boom®-121 Pro Insulation and **screw** onto the valve of the Sika Boom® PRO Dispenser gun
- 3** Regulate the foam flow by applying more or less pressure on the adapter
- 4** Spray the foam 30-45 cm distance from the wall or ceiling for applications. Vertical gaps should be filled with foam starting at the bottom and moving up

TECHNICAL DATA

Density (ASTM D1622):	15 ± 1 kg/cm ³
Compressive Strength (DIN 53421):	0.03 MPa
Curing Time:	Full cure: 24 hours
	Tack-free time: 4 minutes

TYPICAL APPLICATION

- Roofs
- Attics
- Basements
- Interior walls
- Interfloor overlapping
- Rim joint sealer

PACKAGING

700 g (25 oz) can

COLOR

Light yellow



The information contained herein and any other advice are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. The information only applies to the application(s) and product(s) expressly referred to herein and is based on laboratory tests which do not replace practical tests. In case of changes in the parameters of the application, such as changes in substrates etc., or in case of a different application, consult Sika's Technical Service prior to using Sika products. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request or may be downloaded from our website at: www.sika.ca.

Sika Canada Inc.
Head Office
601, avenue Delmar
Pointe-Claire, Quebec
H9R 4A9

Other locations
Boisbriand (QC)
Brantford; Cambridge;
Sudbury; Toronto (ON)
Edmonton (AB) Surrey (BC)

1-800-933-SIKA
www.sika.ca

© Sika Canada Inc. / 01.2025

BUILDING TRUST
CONSTRUIRE LA CONFIANCE

