SPECIFICATION SHEET



ACCENT SINGLE HANDLE KITCHEN PULL-DOWN FAUCET



Model #:

Specific Features:

Project Name: Submitted For:

Date:

Lever Handle

Pull-Down Ball Joint Swivel Sprayhead with 2 Spray

Patterns

8" Reach, 7-1/2" From Deck to Aerator

Ceramic Disc Cartridge with Temperature Limit Stop

• 1 or 3-Hole 8" Installation

Ball Joint Swivel Spray Head

Easy-Install 30" Flex Supply Lines With 3/8" Connections

Deck Cover Plate Included

K-5040 SHOWN ADA


Model #	Features	Finish	
K-5040*		СР	
K-5040-BN*		PVD BN	
K-5040-ORB*		ORB	

^{*} Aerator limited to 1.8 GPM Flow Rate

Olympia products are engineered and manufactured to meet the following standards and codes:

ASME A112.18.1 ANSI A117.1 ANSI / NSF 61, SECTION 9 IAPMO LISTED

CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

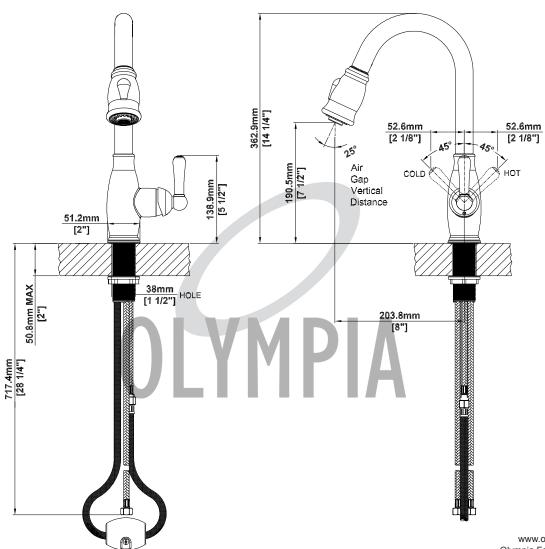

Nashville, TN www.olympiafaucets.com Olympia Faucets, Inc. © 2012 A Pioneer Industries Inc. Brand DMSPK-5040/REV. 03.08