

## Bancroft® 5.5' Bath

# K-1156-W1



### **Features**

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Three heat settings allow you to customize the surface temperature.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Reversible drain.
- Coordinates with other products in the Bancroft collection.

## Material

Acrylic

## Installation

Drop-in

## **Recommended Accessories**

K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7161-AF Bath Drain K-7265 Clearflo Bath Drain K-24916 Wireless Music Kit K-37382 45" Rough-in Cable Bath Drain



## Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 Greenguard UL 2818 - Gold

## KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Color/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar





## **Bancroft®**

5.5' Bath **K-1156-W1** 

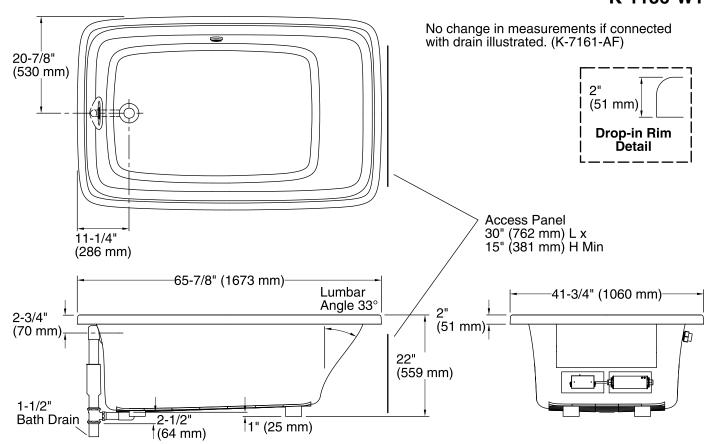

## **Required Electrical Service**

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface: 120 V, 15 A, 60 Hz

### **Technical Information**

All product dimensions are nominal.

Installation: Drop-in Drain location: End

Basin area, bottom: 46" x 30" (1168 mm x 762 mm) Basin area, top: 57" x 34" (1448 mm x 864 mm)

Weight: 80 lbs (36.3 kg)

Minimum floor load: 47 lbs/ft<sup>2</sup> (229.5 kg/m<sup>2</sup>)

Water depth: 16" (406 mm)
Water capacity: 95 gal (359.6 L)

Template: Drop-in, 1043292-7, required, included Electrical component Heated Surface: 120 V, 0.5 A, 60 Hz, 65

rating: W

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

