



Top-/Under-Mount Kitchen Sink K-8185-1

Features

- 36-inch minimum base cabinet width for under-mount or top-mount installation.
- Double-equal bowls.
- 9" depth provides generous workspace.
- Includes 1 faucet hole on rear deck (3 more faucet holes available for knockout with ball-peen hammer & punch).
- Includes cutout templates.
- Includes K-5662 bottom sink rack.
- Optional K-5186 bottom basic rack(sold separately)

Material

- KOHLER Neoroc® composite is durable and built to withstand day-to-day cleaning tasks.
- Matte finish offers rich, dimensional color.
- Solid color throughout the sink.
- Heat resistant up to 750 degrees F.
- Scratch, stain, chip, and thermal-shock resistant.

Installation

Top-mount or undermount.

Recommended Products/Accessories

K-8801 Sink Strainer K-8799 Sink Strainer K-23726 Drain treatment K-23730 Neoroc® cleaner

Optional Products/Accessories

K-5186 Right-Bowl Sink Rack K-11352 Disposal Flange with Stopper K-9000 P-Trap

Included Components

Additional Components: K-5662



Codes/Standards

CSA B45.5/IAPMO Z124

KOHLER® Neoroc® Sinks Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CM7	Matte Graphite
	CM1	Matte Black
	CM2	Matte Brown
	СМЗ	Matte Toupe





Kennon®

Top-/Under-Mount Kitchen Sink K-8185-1

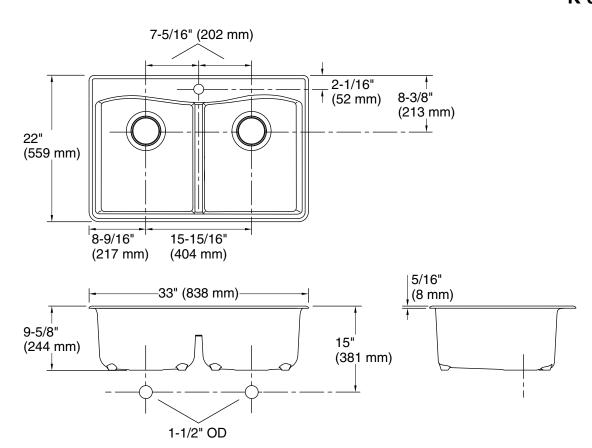

Technical Information

All product dimensions are nominal.

Installation: Under-mount, Top-mount

Min. base cabinet 36" (914 mm)

width:

Bowl area:

Bowl area (Left): Length: 14-9/16" (370 mm)

Width: 16-13/16" (427 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm) Length: 14-9/16" (370 mm)

Width: 16-13/16" (427 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)

Faucet hole spacing: 4" (102 mm)

Drain hole: 3-7/8" (98 mm)

Template: 1281758-7, required, included

Notes

Install this product according to the installation instructions.



