

GAZEBO penguin inc.

4660 HICKMORE ST. MONTREAL, QUEBEC

TEL: 1-514-276-3485, 1-800-737-7174


Email: customerservice@gazebopenguin.com

PLEASE READ IN ITS ENTIRETY BEFORE INSTALLATION

W1608MR-12 SAND W1608MR-32 SLATE

PLEASE READ IN ITS ENTIRETY BEFORE INSTALLATION

ASSEMBLY INSTRUCTIONS 8 X 16 SOLARIUM

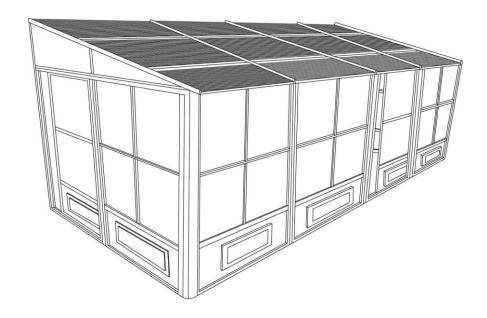

DO NOT DESTROY THE BOXES UNTIL COMPLETELY ASSEMBLED PLEASE VERIFY THE CONTENT OF EACH BOX AGAINST THE LIST OF PARTS

Assembly by two or three adults is suggested.

Requires 96" clearance at the wall Base Dimensions 190"x 94 1/2", Largest Dimensions 190"x98 1/2" (see pg.19)


TOOLS REQUIRED:

- Screwdriver (Philips #2)
- Knife
- File (smooth)
- Needle-nosed pliers
- Rubber mallet
- Step ladder (minmum 6' in height)
- Spatula
- Power drill
- Tube of silicon
- Drill bit 5/16" cement (according to surface)
- Round file + flat
- 2"x4"x8" wood



Ensure that you have a solid base, such as concrete or wooden deck, not slanted more than 1" per 8'. Avoid installing unit adjacent to trees or a sloped roof, as snow and ice may slide onto the solarium and cause it to collapse.

Please don't destroy boxes until completely assembled.

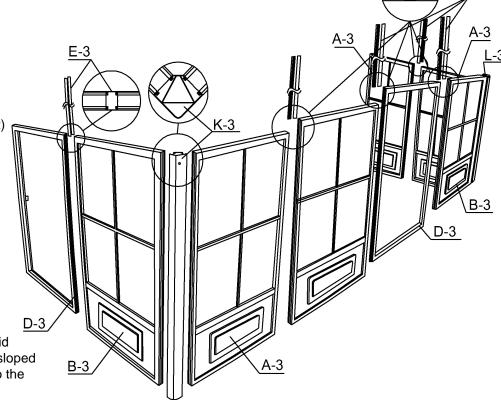

STEP #1

Decide the position of the door frames before assembly according to where you intend to slide the door. At the front of the solarium, use frame D3 for the opening of the door and B3 for the direction of the door when open. Use E3 between frame ends and use two (2) K3 joints for corners.


Look for the sticker that will show you which side is up. (See sketch on page 14)


NOTE:

When sliding the connectors, shake the frame so that they will slide easily. Do not use tools to force. If needed, clean the paint with a file and make sure the ends of the frame and joints are not bent or warped. If so, use the needle-nosed pliers to straighten.


STEP #2


Slide the vertical guides Vv-3 left and Ww-3 right into the 2 ends of the frames along the grooves, shaking while sliding for easier movement.

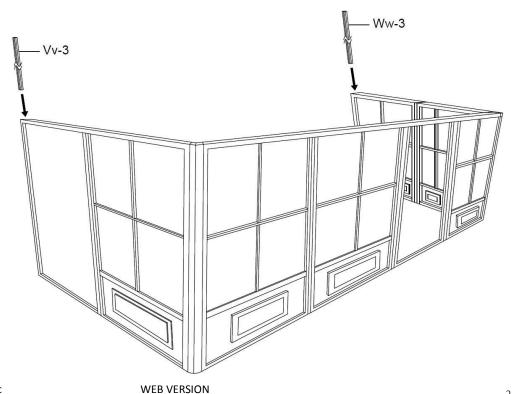

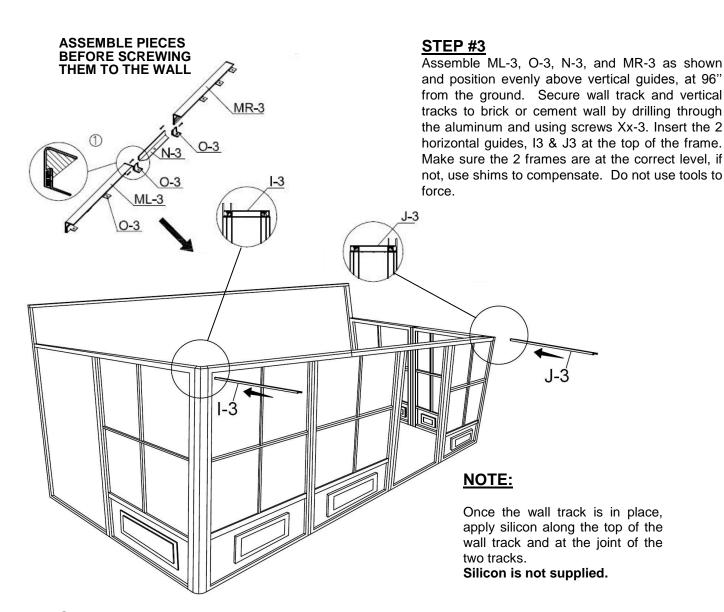

Set polycarbonate exposed side on the outside over horizontal left guide I-3, use one (1) Rr-3 panel, one (1) P-3 joint and one (1) Ss-3 panel, then do the right side with one (1) Tt-3 panel, one (1) Q-3 joint and one (1) Uu-3 panel over the J-3 horizontal guide. Secure P-3 and Q-3 to I-3 and J-3 respectively with self-tapping screws (PQ-3).

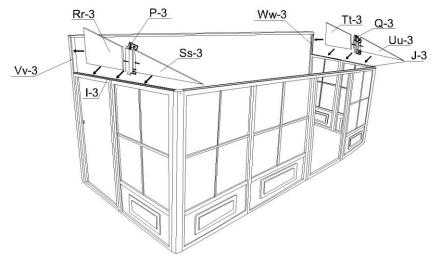

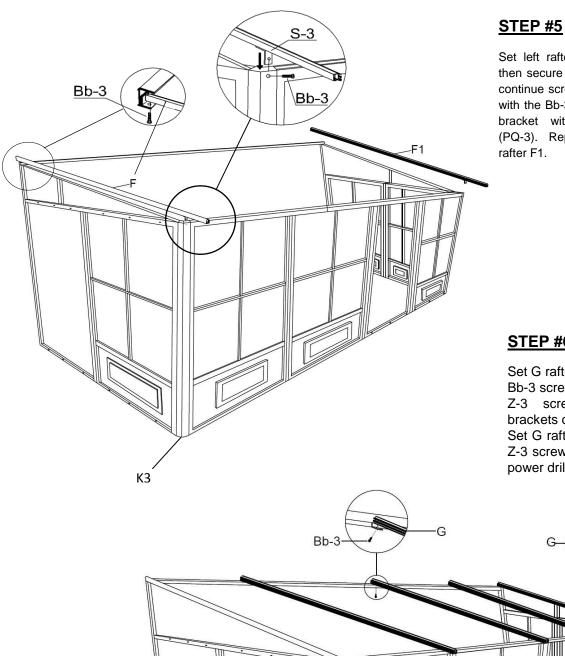


Set left rafter F over last bracket then secure it with Bb-3 screw and continue screwing through joint K-3 with the Bb-3 screw. Secure to Q-3 bracket with self-tapping screw (PQ-3). Repeat on right side with

STEP #6


Set G rafters over the bracket with Bb-3 screws at the top and two (2) Z-3 screws over the preset brackets on the rafters.

Set G rafter on each joint and use Z-3 screws manually. Do not use power drill to screw Z-3.

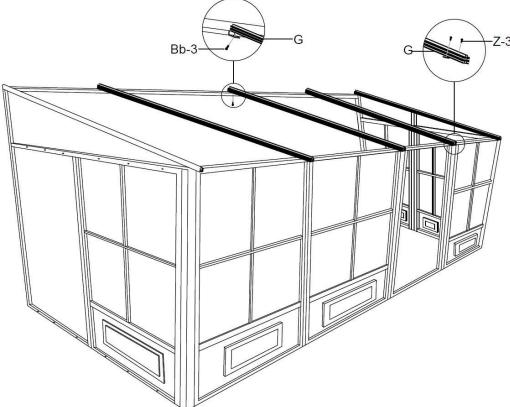

DOOR UNIT(S) MUST BE ASSEMBLED INSIDE OF SOLARIUM.


Slide upper door track F-3 into wheels of sliding door C-3. Slide lower door track G-3 and make sure inserts are close enough to the frame to attach. Use bolt Bb-3 to affix the plastic stopper H-3 on each end of top door rail F-3. Use Oo-3 screws to affix upper door rail and cap Nn, at each end of top rail door.

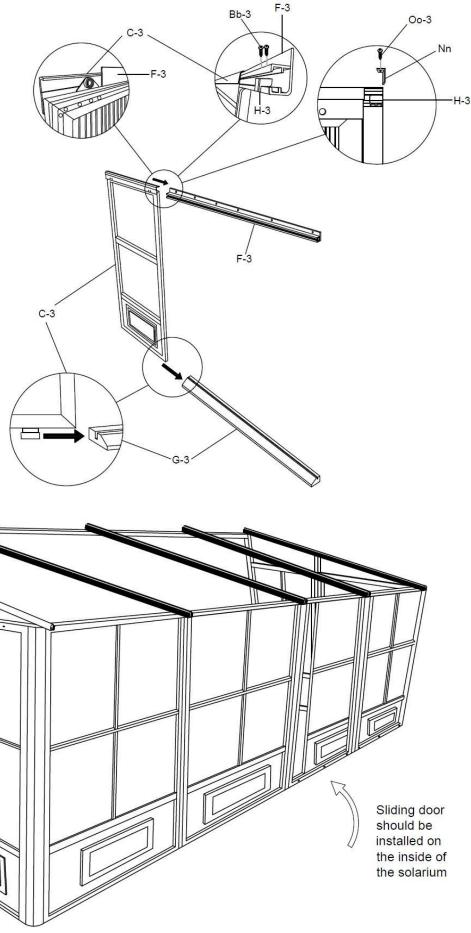

Sliding door


should be installed on the inside of the solarium

Lift up door and track inside of solarium then set it over the door opening by screwing at the top. First use bolts (Ww) and washers (Gg-3) on the inside and female bolts (Cc-3-2) on the outside for the top assembly. See diagram below. Attach lower track with bolts (Cc-3) and washers (Gg-3). Set up door latch on the side required for your door to lock, adjust latch as required.

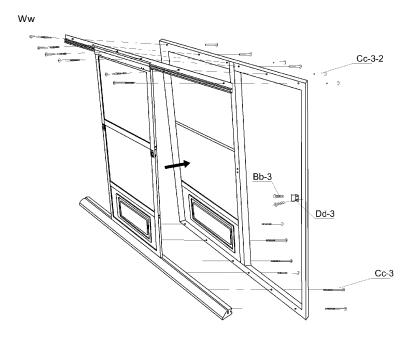


STEP #9


Install crossbeams (L1, L2) under rafters (F, F1, G). Use Cc-3 screws + Hh-3 nuts for the splice, then secure to the rafter with Cc-3 screws. Make sure it's tight.

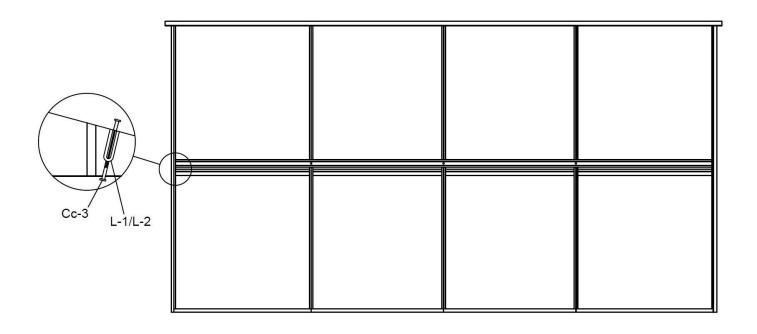


Slide roof panels (A, A1) onto lower track of rafters (F, F1, G).

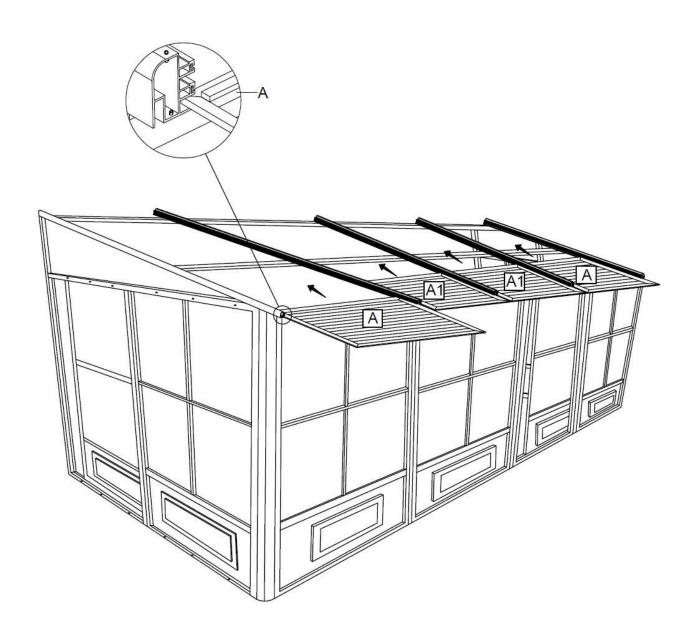


Slide roof panels (B, B1) onto middle track of rafters (F, F1, G).

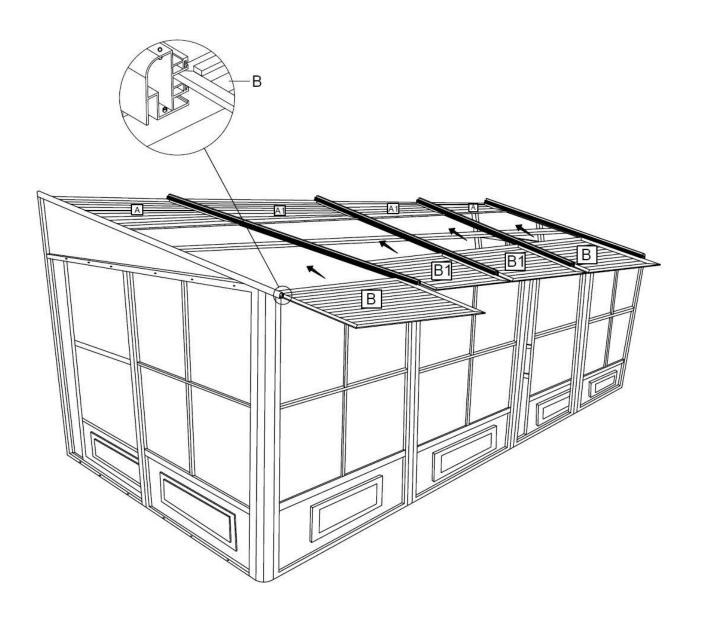


Set roof panels (C, C1) onto rafters (F, F1, G).




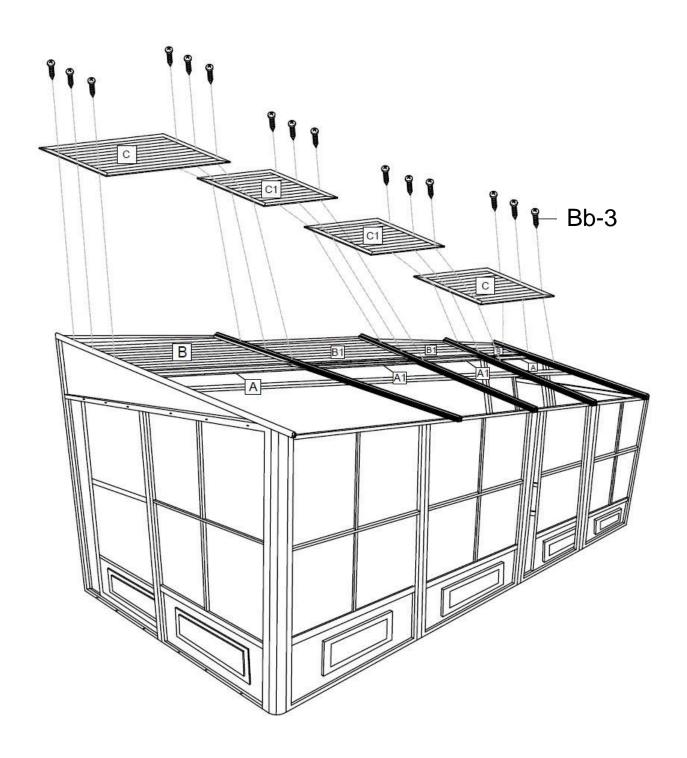


- 1. Close front end of rafters using brackets (M) with 2 bolts (Bb-3) for each.
- 2. Slide back down middle and lower roof panels (A, A1, B, B1)

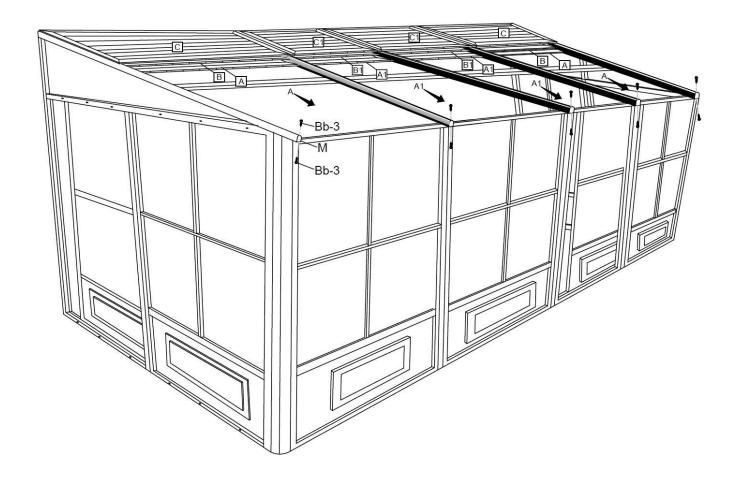

Anchor the solarium to the deck or floor securely using screws and shields supplied. See diagram below.

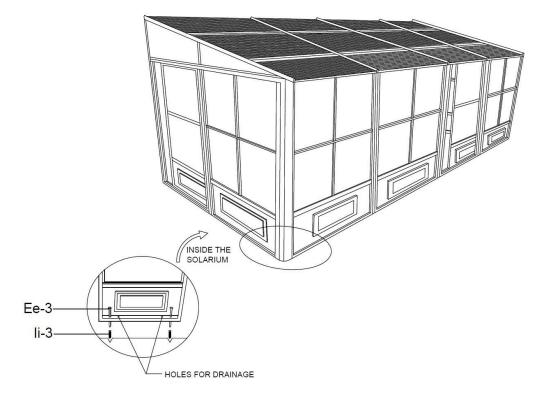

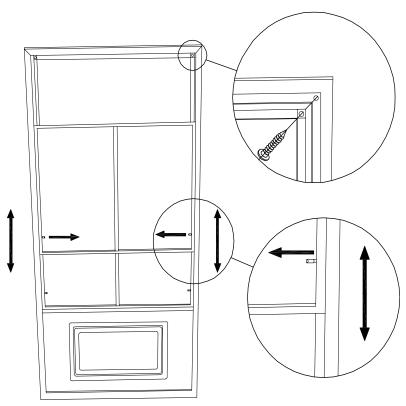

SPECIAL NOTES

To remove a screen, remove the two (2) screws at the top of the frame then pull sideways to the opposite end of the handles to remove. To remove wind panels, push or pull to one side, making sure that locking pin is not locked then remove panels gently, panels are easy to remove.

CLEANING INSTRUCTIONS:

Use only mild or warm soapy water, no strong or abrasive cleaning products. Be sure to remove heavy snow and/or ice.

WARNING:

- Do not use a BBQ or any other flammable product inside the solarium.
- 2) Remove snow from the roof.

SOLARIUM W1608MR-12 SAND (see page 15 for Slate parts)

DESCRIPTION	PACKED IN BOX	QTY	DRAWING	DESCRIPTION	PACKED IN BOX	QTY	DRAWING	
19-029-12 ROOF PANEL A	1	2		19-030-12 ROOF PANEL A1	1	2		
10-496-12 REGULAR	2	2		19-031-12 ROOF PANEL	4	2		
FRAME A-3	3	2		B B	1	2		
19-032-12 ROOF PANEL	1	2		10-497-12 FRAME NEXT TO DOOR	2	1		
B1		_		B-3 (Has more holes)	3	1		
08-158-12 BOLT Bb-3	4	69	(M6*16mm)	19-033-12 ROOF PANEL C	1	2		
19-034-12 ROOF PANEL	1	1 2	2		10-498-12 SLIDING DOOR	2	1	
C1				C-3	3	1		
08-161-12 BOLT Cc-3	4	23	(M6*70mm)	12-037-12 FEMALE BOLT Cc-3-2	4	12	M6*60mm	
10-499-12 SLIDING	2	1		08-169-12 LEFT DOOR	4	2		
DOOR FRAME D-3	3	1		LATCH Dd-L-3	4	2		
08-165-12 RIGHT DOOR LATCH Dd-R-3	4	2		11-544-12 CONNECTING PIECE E-3	4	10	<u> </u>	
19-052-12 SCREW Ee-3	4	12	(M6*63.5mm)	19-035-12 LEFT ROOF BAR F	4	1	€ The state of th	

DESCRIPTION	PACKED IN BOX	QTY	DRAWING	DESCRIPTION	PACKED IN BOX	QTY	DRAWING
19-036-12 RIGHT ROOF BAR F1	4	1	到	11-545-12 TOP DOOR RAIL F-3	4	2	
19-037-12 REGULAR ROOF BAR G	4	3		11-546-12 BOTTOM DOOR RAIL G-3	4	2	
08-187 WASHER Gg-3	4	22	0	08-138-12 PLASTIC STOPPER H-3	4	4	
12-161 NUT Hh-3	4	4		10-500-12 LEFT SIDE RECEIVER I-3	4	1	
08-193-12 PLASTIC PLUG Ii-3	4	12		10-501-12 RIGHT SIDE RECEIVER J-3	4	1	
10-502-12 CORNER CONNECTOR K-3	4	2	\(\frac{1}{2}\)	19-083-12 LEFT CROSSBEAM L-1	4	1	<u>\$</u>
19-084-12 RIGHT CROSSBEAM L-2	4	1	0	19-043-12 ROOF RAFTER CAP M	4	5	
19-082-12 TRACK ML-3	4	1		19-081-12 TRACK MR-3	4	1	
10-505-12 TRACK JOINT N-3	4	1		08-134-12 UPPER DOOR RAIL END CAP Nn	4	4	
10-506-12 RAFTER BRACKET O-3	4	4		08-135-12 SCREW Oo-3	4	4	(M4*12mm)

DESCRIPTION	PACKED IN BOX	ату	DRAWING	DESCRIPTION	PACKED IN BOX	QTY	DRAWING
19-048-12 LEFT GABLE JOINT P-3	4	1		13-045-12 SELF- TAPPING SCREW PQ-3	4	4	
19-049-12 RIGHT GABLE JOINT Q-3	4	1		19-044 LEFT BACK GABLE PANEL Rr-3	1	1	
19-045 LEFT FRONT GABLE PANEL Ss-3	1	1		19-046 RIGHT BACK GABLE PANEL Tt-3	1	1	
15-126-12 MOUNTING BRACKET U-3 (ASSEMBLED ON ROOF BAR G)	4	3	000	19-047 RIGHT FRONT GABLE PANEL Uu-3	1	1	
19-050-12 LEFT WALL GUIDE Vv-3	4	1	* *	12-047-12 BOLT Ww	4	12	() M5*15mm
19-051-12 RIGHT WALL GUIDE Ww-3	4	1	+ +	10-529-12 SCREW FOR FIXING TO WALL Xx-3	4	18	
08-156-12 SCREW Z-3	4	10	(

SOLARIUM W1608MR-32 SLATE

DESCRIPTION	PACKED IN BOX	QTY	DRAWING	DESCRIPTION	PACKED IN BOX	QTY	DRAWING
19-029-32 ROOF PANEL A	1	2		19-030-32 ROOF PANEL A1	1	2	
10-496-32 REGULAR	2	2		19-031-32 ROOF PANEL	1	2	
FRAME A-3	3	2		В	'		
19-032-32 ROOF PANEL	1	2		10-497-32 FRAME NEXT TO DOOR	2	1	
B1	•	_		B-3 (Has more holes)	3	1	
08-158-32 BOLT Bb-3	4	69	(M6*16mm)	19-033-32 ROOF PANEL C	1	2	
19-034-32 ROOF PANEL	1	1 2		10-498-32 SLIDING DOOR	2	1	
C1				C-3	3	1	
08-161-32 BOLT Cc-3	4	23	(M6*70mm)	12-037-32 FEMALE BOLT Cc-3-2	4	12	M6*60mm
10-499-32 SLIDING	2	1		08-169-32 LEFT DOOR	4	0	
DOOR FRAME D-3	3	1		LATCH Dd-L-3	4	2	
08-165-32 RIGHT DOOR LATCH Dd-R-3	4	2		11-544-32 CONNECTING PIECE E-3	4	10	<u>4</u> 4
19-052-32 SCREW Ee-3	4	12	(M6*63.5mm)	19-035-32 LEFT ROOF BAR F	4	1	


DESCRIPTION	PACKED IN BOX	QTY	DRAWING	DESCRIPTION	PACKED IN BOX	QTY	DRAWING
19-036-32 RIGHT ROOF BAR F1	4	1	弘	11-545-32 TOP DOOR RAIL F-3	4	2	
19-037-32 REGULAR ROOF BAR G	4	3		11-546-32 BOTTOM DOOR RAIL G-3	4	2	
08-187 WASHER Gg-3	4	22	0	08-138-32 PLASTIC STOPPER H-3	4	4	
12-161 NUT Hh-3	4	4		10-500-32 LEFT SIDE RECEIVER I-3	4	1	
08-193-32 PLASTIC PLUG li-3	4	12		10-501-32 RIGHT SIDE RECEIVER J-3	4	1	
10-502-32 CORNER CONNECTOR K-3	4	2	\(\frac{1}{2}\)	19-083-32 LEFT CROSSBEAM L-1	4	1	<u> </u>
19-084-32 RIGHT CROSSBEAM L-2	4	1	0	19-043-32 ROOF RAFTER CAP M	4	5	
19-082-32 TRACK ML-3	4	1		19-081-32 TRACK MR-3	4	1	
10-505-32 TRACK JOINT N-3	4	1		08-134-32 UPPER DOOR RAIL END CAP Nn	4	4	
10-506-32 RAFTER BRACKET O-3	4	4		08-135-32 SCREW Oo-3	4	4	(M4*12mm)

DESCRIPTION	PACKED IN BOX	QTY	DRAWING	DESCRIPTION	PACKED IN BOX	QTY	DRAWING
19-048-32 LEFT GABLE JOINT P-3	4	1		13-045-32 SELF- TAPPING SCREW PQ-3	4	4	
19-049-32 RIGHT GABLE JOINT Q-3	4	1		19-044 LEFT BACK GABLE PANEL Rr-3	1	1	
19-045 LEFT FRONT GABLE PANEL Ss-3	1	1		19-046 RIGHT BACK GABLE PANEL Tt-3	1	1	
15-326-32 MOUNTING BRACKET U-3 (ASSEMBLED ON ROOF BAR G)	4	3	0 0	19-047 RIGHT FRONT GABLE PANEL Uu-3	1	1	
19-050-32 LEFT WALL GUIDE Vv-3	4	1	* *	12-047-32 BOLT Ww	4	12	M 5*15mm
19-051-32 RIGHT WALL GUIDE Ww-3	4	1	+ +	10-529-32 SCREW FOR FIXING TO WALL Xx-3	4	18	
08-156-32 SCREW Z-3	4	10	€ 6 6 1 6 1 1 1 1 1 1 1 1 1 1				





THIS SIDE UP CE CÔTÉ VERS LE HAUT



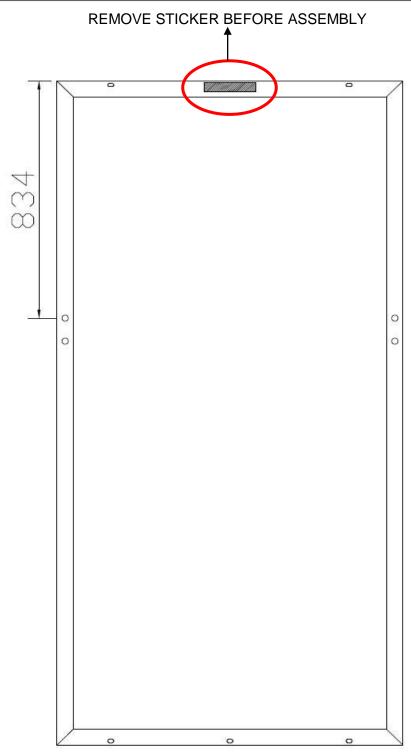

D-3 FRAME

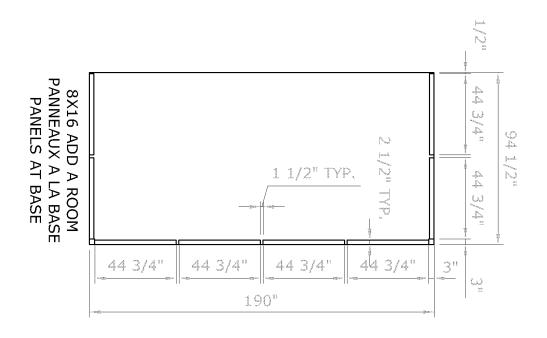

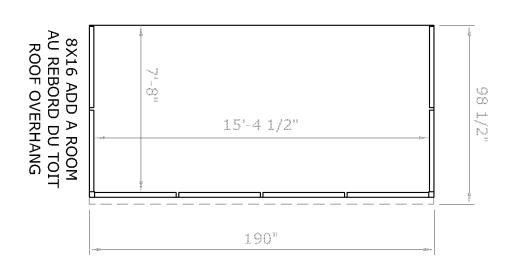

MAINTENANCE NOTES

- 1. In case of a defective or damaged part, or for any other questions concerning the product, please contact the manufacturer directly.
- 2. Please have the parts list and part numbers on hand when ordering or requesting replacement parts.
- 3. The product should not be installed adjacent to trees or a sloped roof. Snow and ice may slide onto the roof and cause it to collapse.
- While the product is designed to stay assembled year long, the roof must be kept free of accumulation of snow.



ONE YEAR LIMITED WARRANTY

This product has been designed and manufactured to meet the highest standards of quality and durability. Subject to the Conditions for Exercising the Warranty and the Limitations on the Warranty set forth below, it is warranted to be free of material and manufacturing defects for a period of **one year** from the date of purchase. Missing and damage due to transportation is not covered by the manufacture warranty. Should the product become damaged, or the warranty period has expired, please contact Gazebo Penguin Customer Service Department for a complete schedule of replacement parts and prices.

CONDITIONS FOR EXERCISING THE WARRANTY

The warranty only applies to the original purchaser with the bill.

In order to properly exercise your warranty, please comply with the following:

Carefully inspect the contents of the carton for missing or damaged components. Should you discover damaged or missing parts, **do not return the product to the place of purchase**, but contact Gazebo Penguin Customer Service Department at the numbers listed below:

Montreal: (514) 276-3485 Elsewhere: 1-800-737-7174

You can also find a claim form to fill out online: http://www.abrispenguin.com/forms.html

NOTE: Damages/missing parts must be reported within 30 days of delivery. If claimed after your request might be rejected.

LIMITATIONS ON THE WARRANTY

- 1. The product is not warranted against damages due to vandalism, abuse, falling or thrown objects, or accumulation of snow.
- 2. The product is not warranted against damages due to extreme weather conditions, such as thunderstorms, hail, strong wind or snow storms, or any other acts of God.
- 3. Leaking due to heavy rain may happen, please refer to the instruction manual for window positions and information on how to evacuate the water.
- 4. The product is only warranted in the event it is installed in accordance with the Gazebo Penguin's written instructions enclosed with the product. (Depending on the model)
- 5. The product is not warranted in the event it has been improperly anchored.
- 6. We reserve the right to replace or repair any defective product or parts at our discretion.
- 7. No change to the unit is allowed. This will void your warranty.