

## Instruction Manual for: PR1000

### 2 LIGHT KITCHEN POT RACK



#### Questions?

E-mail our customer service department at [customerservice@alltherages.com](mailto:customerservice@alltherages.com)

#### IMPORTANT SAFETY INSTRUCTIONS:

For your safety please have this fixture mounted by a qualified electrician or contractor, also because this pot rack is quite heavy it will require 2 or more people to help with installation.

This pot rack was tested to safely hold an additional 20 lbs. of weight. We do not recommend adding more than the specified rated weight.

#### INSTRUCTIONS:

##### Tools:

You will need the following tools and Equipment:

- A. Ladder
- B. Phillips Head Screw Driver
- C. Wire Cutters

##### Optional:

Pliers

##### Carefully Unpack the Fixture:

You should have received the following parts in the package:

- 1 x fixture unit
- 1 x grill/rack
- 4 x fixture brackets
- 4 x decorative nuts
- 10 x hooks
- 4 x four inch long, ¼ in. diameter screws (rated for 200 lbs.)
- 3 x wire nuts
- 2 x outlet box screws
- 1 x crossbar w/ threaded pipe and ground screw

**TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse.**

**MIN 60<sup>o</sup> C SUPPLY CONDUCTORS.**

**CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.**

##### Assembly:

**Step 1:** Place fixture unit on a clean flat surface. Unscrew 4 decorative nuts from the light bar and set aside for use in "Step 2". Place the grill/rack into the fixture unit bottom frame (slats are on each end of the bottom of the frame to hold the grill/rack in place).

**Step 2:** Attach the brackets first to the bottom frame using 4 x decorative nuts by lining up the holes in the brackets to the holes in the frame. Once complete, attach the top of the brackets to the light bar using the previously removed decorative nuts from Step 1 using the same method.

**Step 3:** Install light bulbs. Use only bulbs of specified type and maximum rated wattage or less.

##### Installation:

**Note:** To hang fixtures weighing over 50 lbs. (22.68 kg.) (over 25 lbs. (11.34 kg.) in Canada) the cross bar must be supported independently of the ceiling outlet box. Included are 4 inch long, 1/4" (6.35 mm) diameter screws (rated for 200 lbs. 90.72 kg. or greater) which are to be installed through the cross bar, outlet box, and securely into the ceiling structure or cross brace. This installation must be able to support at least four times the weight of the fixture. Please check before starting installation. If unsure please consult a qualified technician.

##### Step 4:

**A.** Screw about 1/2" (12.70 mm) of the threaded tube into center hole in the crossbar. **Note: The protruding sides of cross bar must face down.**

**B.** Fasten crossbar onto the outlet box using two outlet box screws. Again, the protruding sides and screws of crossbar must face down. Fasten crossbar against ceiling, independently of the outlet box as described in above note. Secure two to four 4 inch screws (included) through the four holes around the middle hole in the crossbar, then through the outlet box holes, and securely into the ceiling structure member or cross brace.

**C.** At this point, test install the canopy onto ceiling with the threaded pipe and make certain 5/16" (7.94 mm) of the threaded pipe protrudes below the canopy. If not, then adjust the depth by screwing up or down accordingly.

**D.** Once the correct location has been adjusted, remove canopy and crossbar from outlet box.

**E.** Lock threaded pipe into crossbar by fastening the included nut onto the threaded pipe. **Note: Do not spin threaded pipe during tightening.**

##### Fixture wire connections:

##### Step 5:

**A.** Strip 3/4 inch of insulation from wire ends of fixture and of supply circuit wires. Attach ground supply circuit wire and ground fixture wire to the crossbar with the green screw provided. (Alternatively, if there is no ground supply circuit wire, only attach the ground fixture wire to the crossbar with the green screw. **Never connect ground wire to black or white power supply wires.** Twist stripped wire ends of fixture and supply circuit wires together **clear smooth side fixture wire (hot)** to black (hot) and **clear ribbed side fixture wire (neutral)** to white (neutral). Twist on wire nuts. Tape wire nuts and wires together. Carefully tuck connected wires and wire nuts into outlet box.

**B.** Raise canopy against the ceiling and lock into position by screwing the large decorative nut onto the threaded pipe.


##### Adjustments:

If a shorter chain length is desired you can remove links to achieve desired length.

Each link has a small slit opening, please carefully remove the link(s) by prying them open with pliers. Remove links as needed. Squeeze links closed using pliers. Please ensure that you fully close all links before installation.

##### CLEANING & MAINTENANCE:

1. Turn off the fixture before cleaning.
2. Use a clean, dry, soft, lint-free cloth.
3. Do not use water or other chemical cleaning agents.

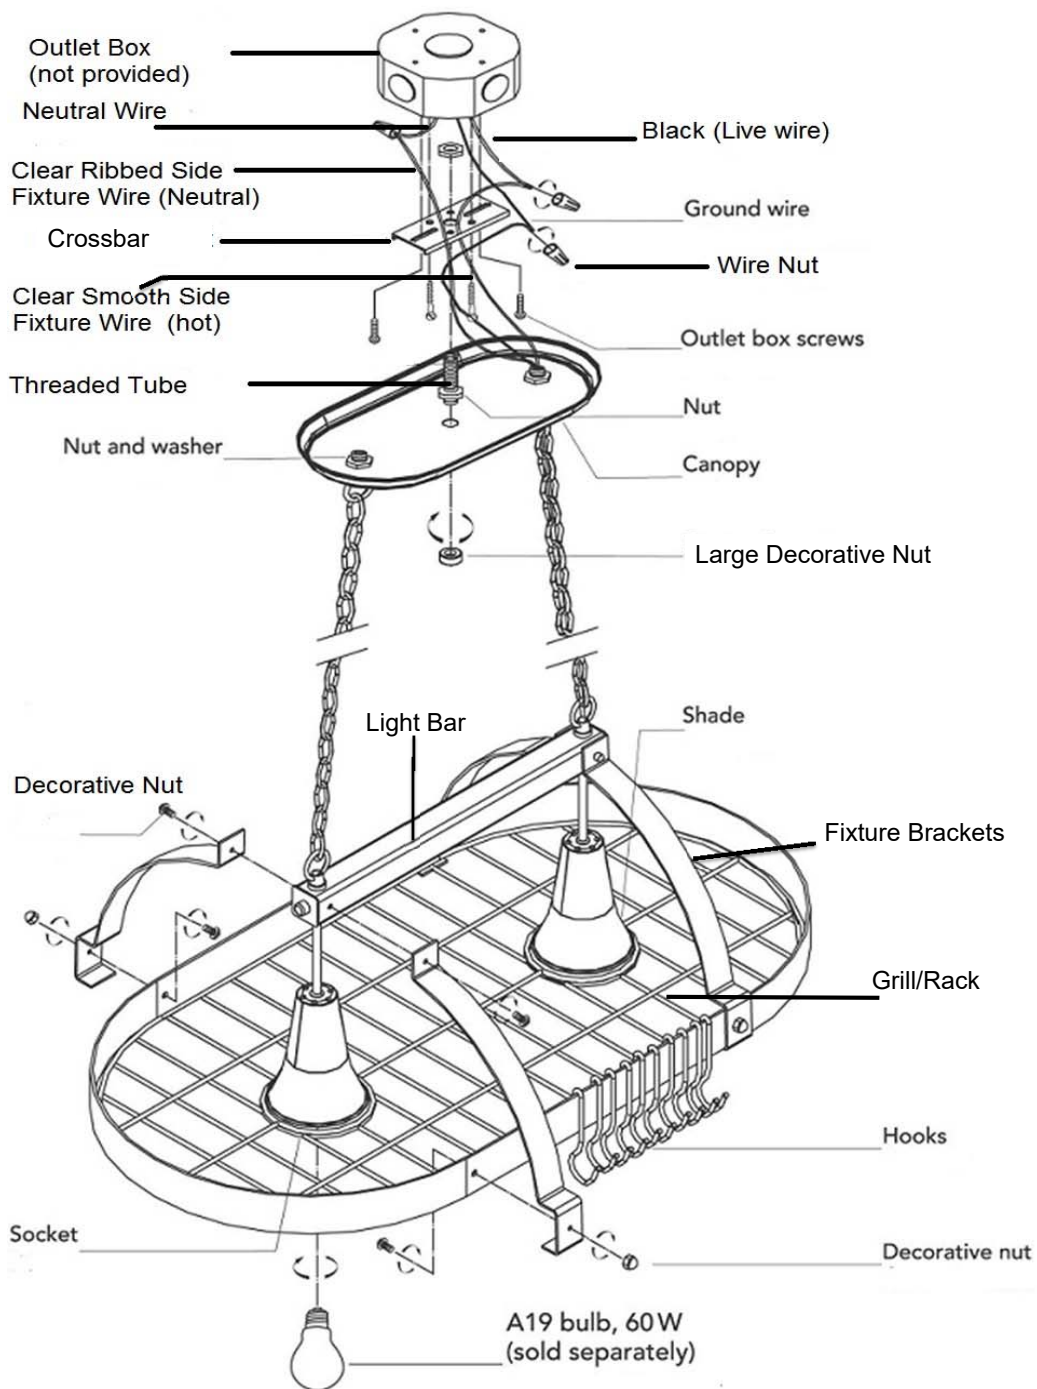

Requires 2x 60W medium base type A bulbs (not included)

## LIMITED WARRANTY

All the Rages Inc, a New Jersey corporation, having its principal place of business at 355 Eisenhower Parkway Livingston, NJ 07039 (All the Rages) warrants its products (the "products") as follows:

1. Limited Warranty.

Manufacturer warrants that the products sold hereunder will be free from defects in material and workmanship for a period of one (1) year from the date of purchase. If the products do not conform to this Limited Warranty during the warranty period (as herein above specified), Buyer shall notify Manufacturer in writing of the claimed defects and demonstrate to Manufacturer's satisfaction that said defects are covered by this Limited Warranty. If the defects and proof of purchase are properly reported to Manufacturer within the warranty period, and the defects are of such type and nature as to be covered by this warranty, Manufacturer shall, as its own expense, furnish replacement products or, at Manufacturer's option, replacement parts for the defective products. Installation of the replacement products or replacement parts shall be at Buyer's expense.

2. Exclusive Obligation:

THIS WARRANTY IS EXCLUSIVE. The sole and exclusive obligation of Manufacturer shall be to repair or replace the defective products in the manner and for the period provided above. Manufacturer shall not have any other obligation with respect to the products or any part thereof, whether based on contract, tort, strict liability or otherwise. Under no circumstances, whether based on this Limited Warranty or otherwise, shall Manufacturer be liable for incidental, special, or consequential damages.

3. Other Statements.

Manufacturer's employees or representatives' oral or other written statements do not constitute warranties, shall not be relied upon by Buyer, and are not part of the contract for sale or this limited warranty.

4. Entire Obligation.

This Limited Warranty states the entire obligation of Manufacturer with respects to the products. If any part of this Limited Warranty is determined to be void or illegal, the remainder shall remain in full force and effect.



ALL THE RAGES INC  
355 EISENHOWER PARKWAY  
LIVINGSTON, NJ 07039  
[WWW.ALLTHERAGES.COM](http://WWW.ALLTHERAGES.COM)  
PRINTED IN CHINA