


ELS Marbella



850 Lumens - 9W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

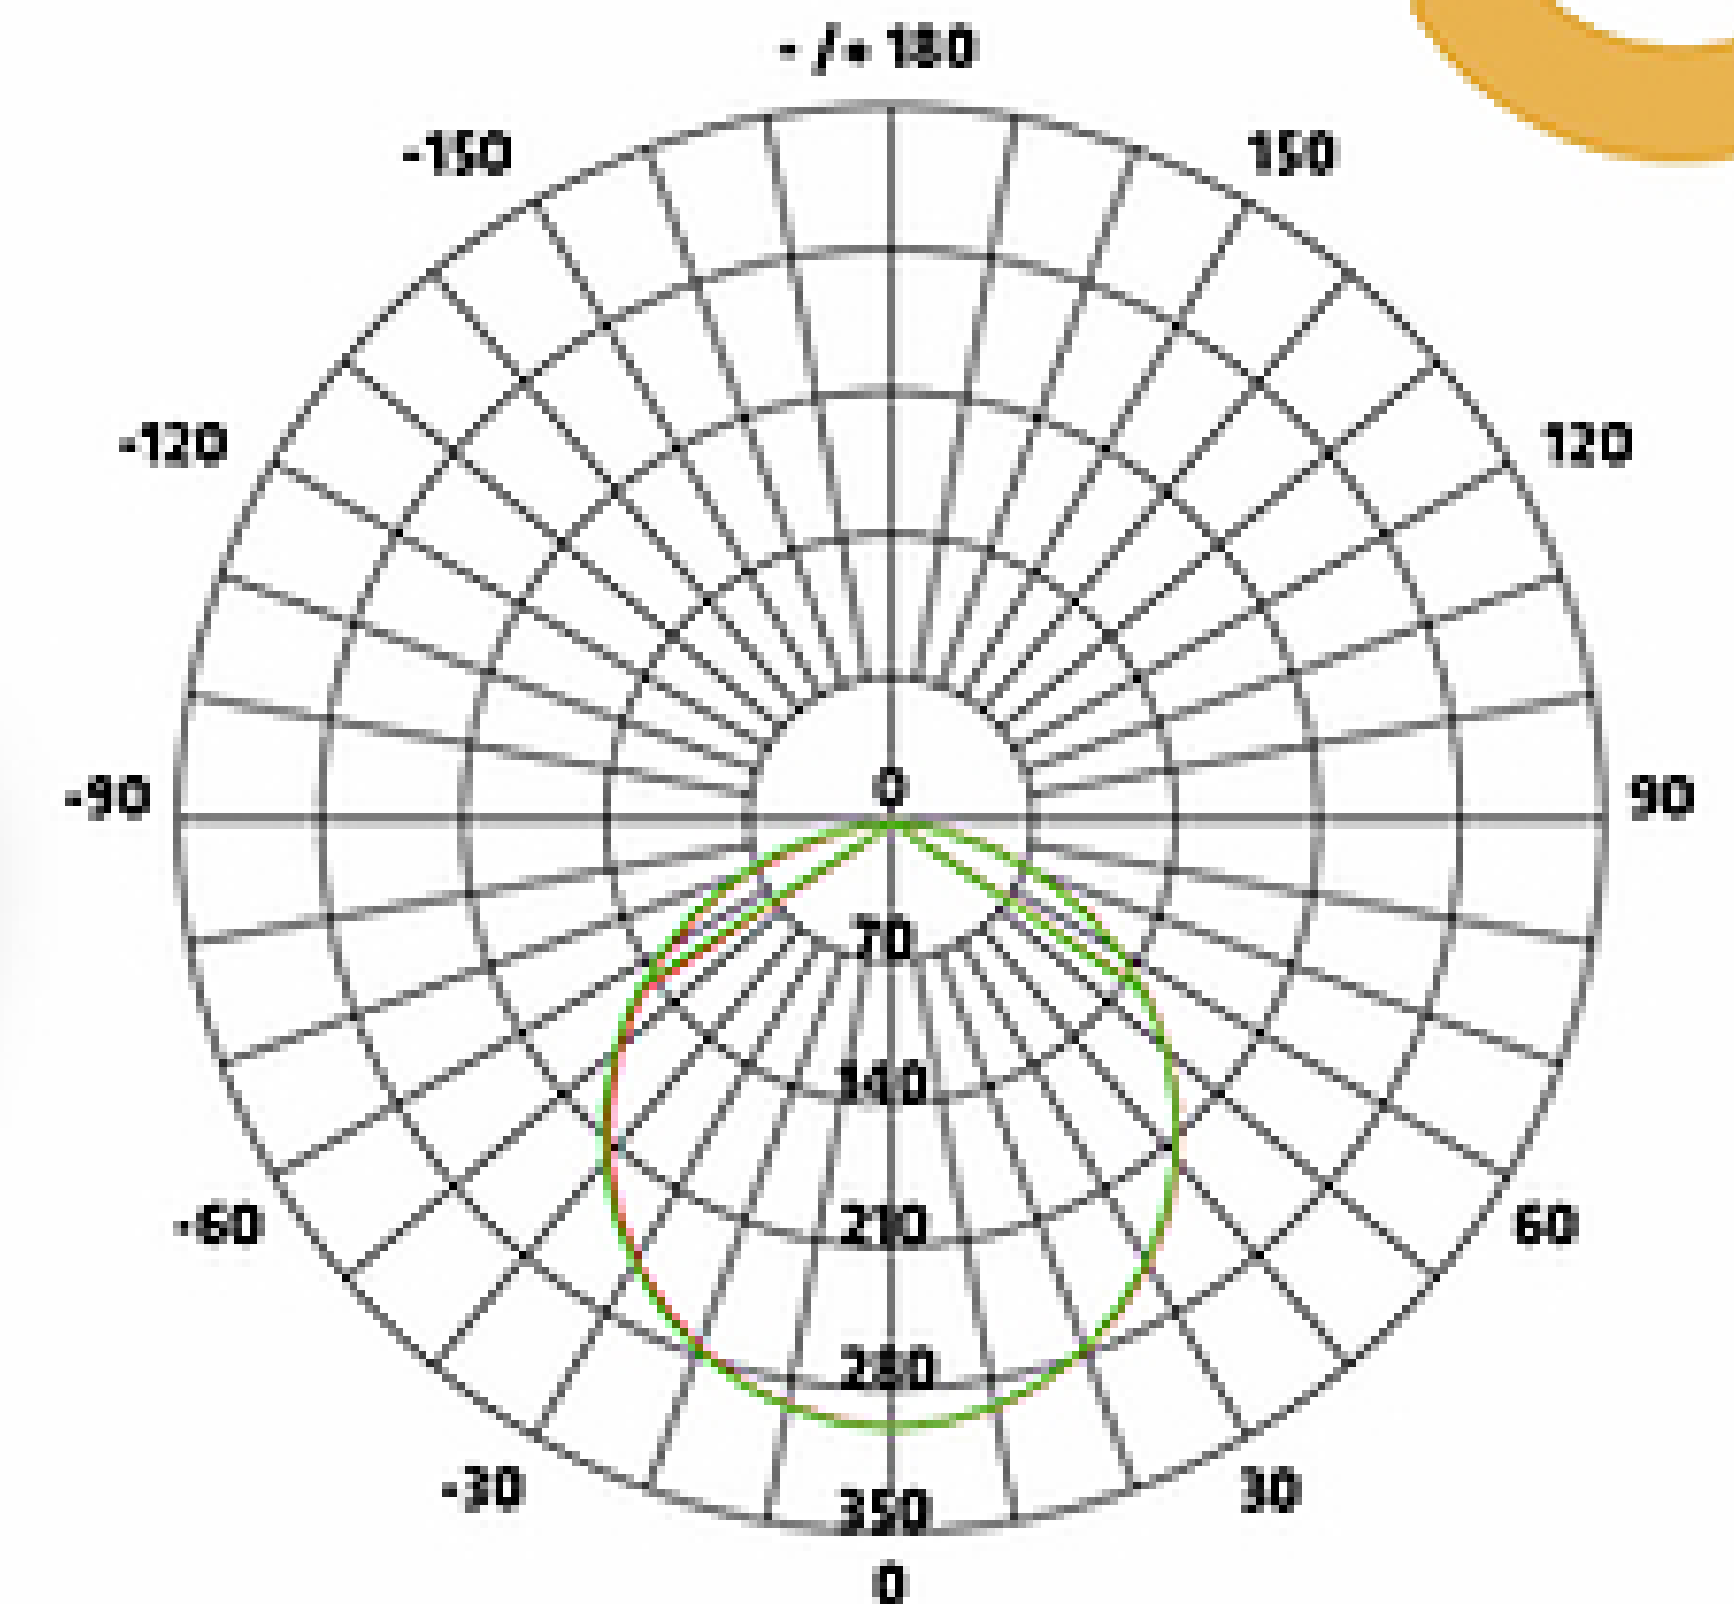

AVERAGE BEAM ANGLE (50%): 120
Unit: CD — CO/180,112.7° — C90/270,113.1°

FIGURE AAI

Flux out: 677.9 lm

Height	Eavg	Emax	Diameter
1m	71.90	300.9 Lx	300.05 cm
2m	17.98	75.22 Lx	600.11 cm
3m	7.993	33.43 Lx	900.16 cm
4m	4.996	18.60 Lx	1200.21 cm
5m	2.877	12.03 Lx	1500.27 cm
6m	1.998	8.357 Lx	1800.32 cm
7m	1.468	6.140 Lx	2100.37 cm
8m	1.124	4.701 Lx	2400.43 cm
9m	0.8881	3.714 Lx	2700.48 cm
10m	0.7193	3.009 Lx	3000.53 cm

Angle: 112.63 deg



Model Numbers **ELSDR1604G35WH-08**

ELS Marbella Series 3CCT "SW" MODE

FIRE RATED
2 HOURS
UL-263

AVERAGE LIFETIME
50 000 HOURS



DIMMABLE