


Item Number: A03878

WARNING (To reduce the risk of fire, electric shock, or injury to persons):






1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “**OFF**” position. B). Place the wall switch in the “**OFF**” position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **Type B,Max 40W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

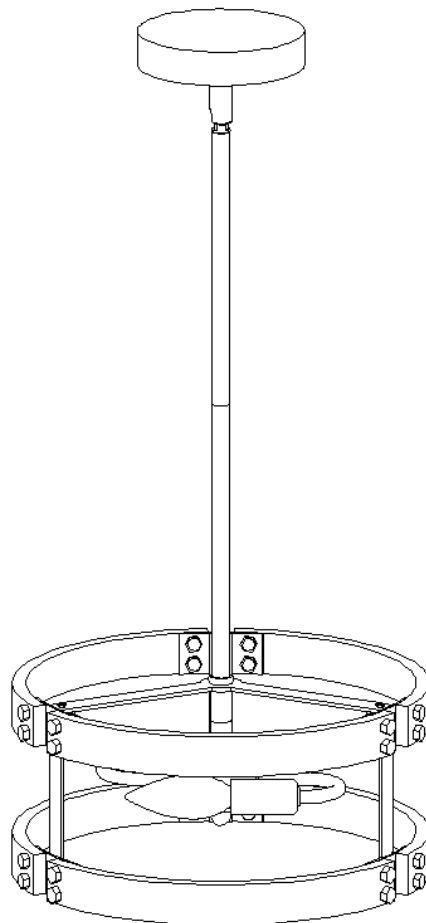


TOOLS REQUIRED (NOT INCLUDED):

Before doing assembly and installation please prepare the needed tools as below picture

				
Ladder	Phillips head.flat blade screwdriver	Electrical tape	Pliers	Wire cutter/Stripper

PARTS TYPE & QTY INCLUDING

- f7L Mounting plate (1)
- f8L Green ground screw (1)
- f9L Canopy (1)
- f1L Swivel joint (1)
- f1L Knob ball (2)
- f1L Ti VY
- f1L Shelf bracket (1)
- (J) Countersunk screw (3)
- f1L Batten f1L
- f1L Hex screw f14L
- f1L Flat iron stents (3)
- f1L Nut f14L
- f1L Stem (1)
- (P) Fixture loop assembly (1)

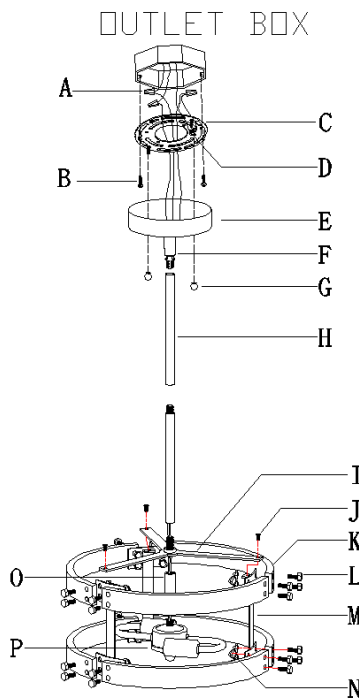

ACCESSORIES ENCLOSED:

- (A) Mounting screw (2)
- (B) Plastic wire connector (3)
- (L) Hex screw (1) spare parts
- (N) Nut (1) spare parts


ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration


2. Turn off power

Before you start to make installation, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position


3. Unscrew the knob ball (G) from canopy (E) then remove the mounting plate (C)




4. 1) Use the outer hex screw (L) and nut (N) to secure the batten (K) and flat iron stents (M) together.
- 2) Fix the shelf bracket (I) and flat iron stents (M) together with countersunk screw (J).

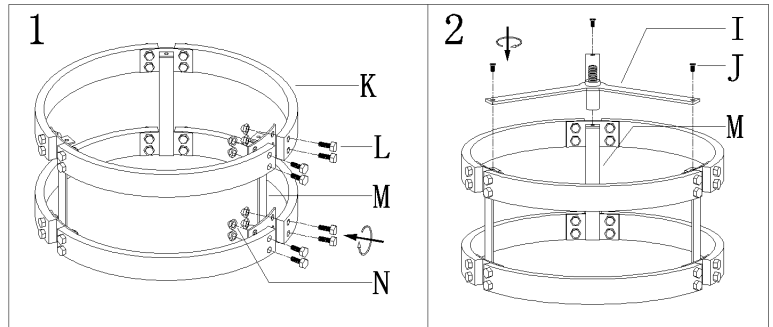

5. 1) Screw the stem (O) on the fixture loop assembly (P) and then twist the stem (O) onto the shelf bracket (I).
- 2) According your desired hanging height to choose and use the tubes (H), then pass the wires and the ground wire through the tubes(H) the swivel joint (F) and the canopy (E).
- 3) Thread the chosen tubes (H) and the canopy (E) with swivel joint (F) together. Hand tighten until snug.

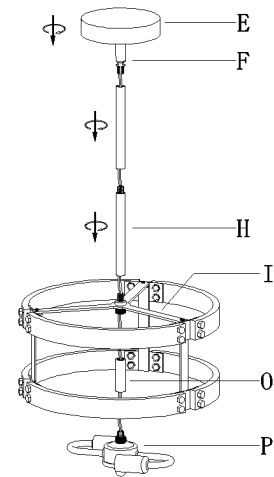

6. Attach the mounting plate (C) to outlet box with the mounting screws(B)




7. Make wire connections

Connect wires as below wires connecting shown. **TAKE NOTE OF YOUR COLOR OF FIXTURE ,NEVER CONNECT WIRES TO GROUND WIRES**


Connect ground wire according to below chart

Connect wires according to below chart

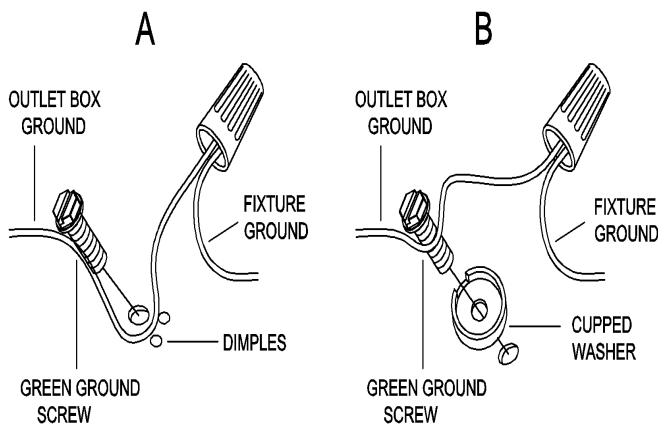


Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear,Brown,Gold or Black without tracer	Clear,Brown,Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)




Twist plastic wire connector(A) until wires are tightly joined together,then carefully stuff all wires into the outlet box

8. Raise canopy (E) to ceiling and secure canopy (E) in place by tightening knob ball (G) onto the threaded nipple on mounting plate.

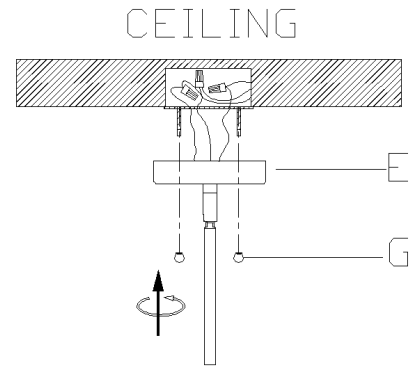

9. Install the bulb (not included) (Please do not exceed the maximum capacity recommended on the socket.)

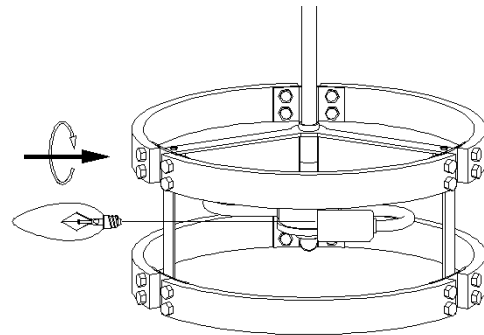

10. Check everything is already installed properly, then you could turn on the light. Enjoy !

CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.