


# Melody DY-BTS40 Electric Fireplace

## Specifications Sheet



Model	Circuit	Max. Power	Lighting Only	Standby	Outlet	Viewing Area	BTU	Cord Length
DY-BTS40	15A, 120V / 60HZ	1500 W	28 W	1.5 W	<ul style="list-style-type: none"> <li>• Standard (type B)</li> <li>• Hardwire ready</li> </ul>	1000 mm W x 400 mm H	5000	1829 mm
						39 3/8 in. W x 15 3/4 in. H		72 in.

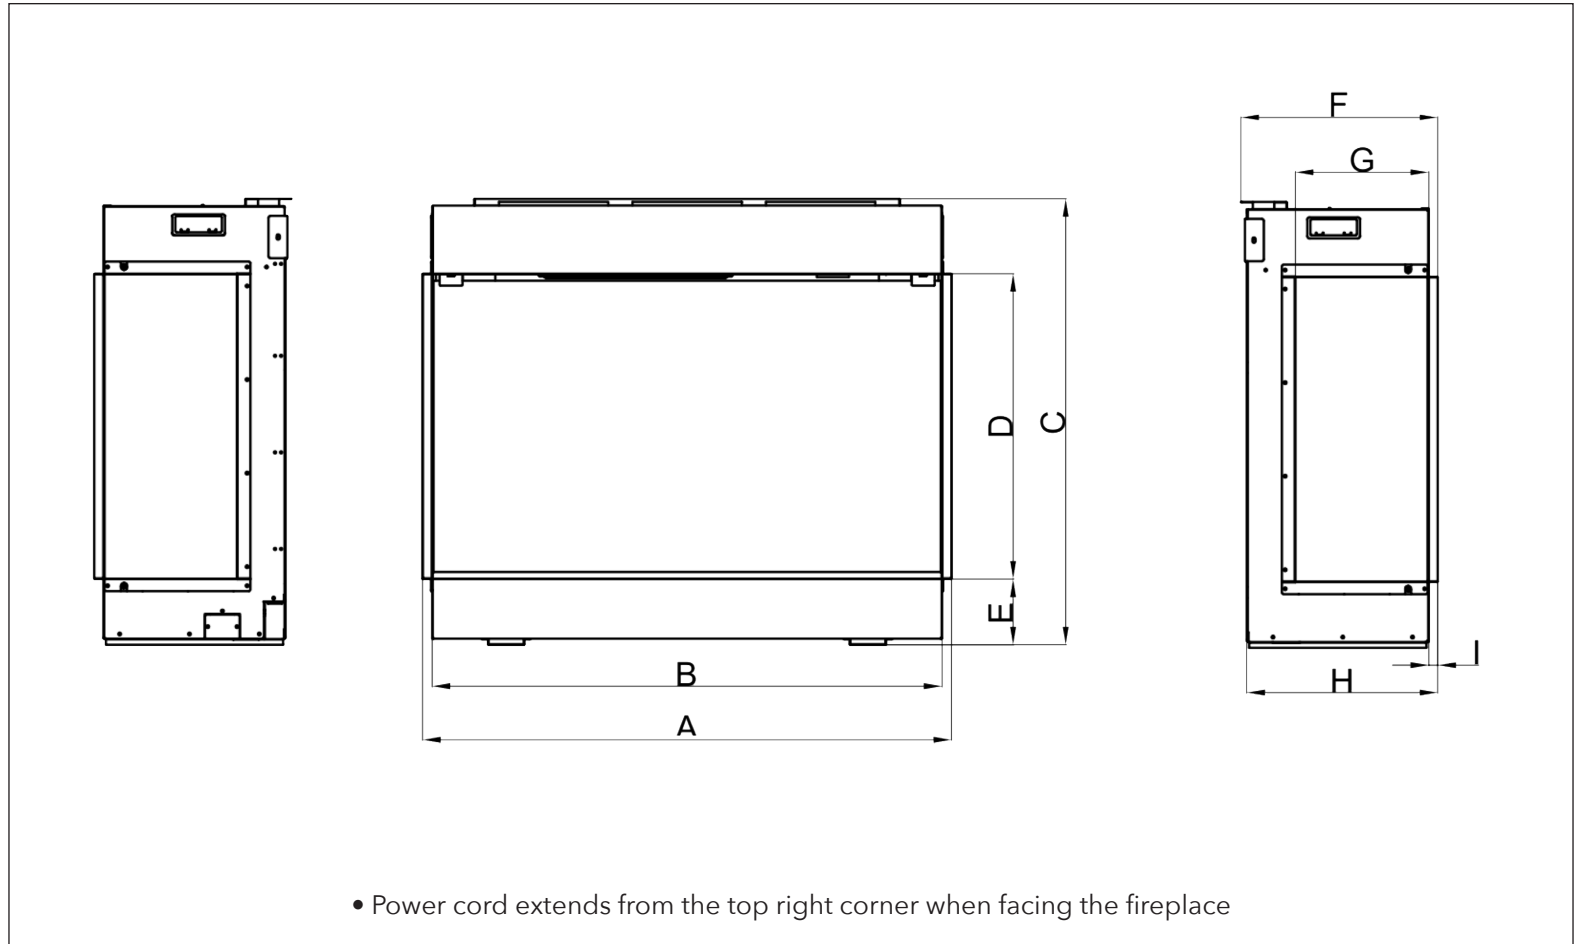

Model	A	B	C	D	E	F	G	H	I
DY-BTS40	1032 mm	1000 mm	633 mm	400 mm	110 mm	325 mm	220 mm	315 mm	15 mm
	40 5/8 in.	39 3/8 in.	25 in.	15 3/4 in.	4 3/8 in.	12 3/4 in.	8 5/8 in.	12 3/8 in.	1/2 in.

### Certification




# Melody DY-BTS40 Electric Fireplace


## Specifications Sheet



### Clearances

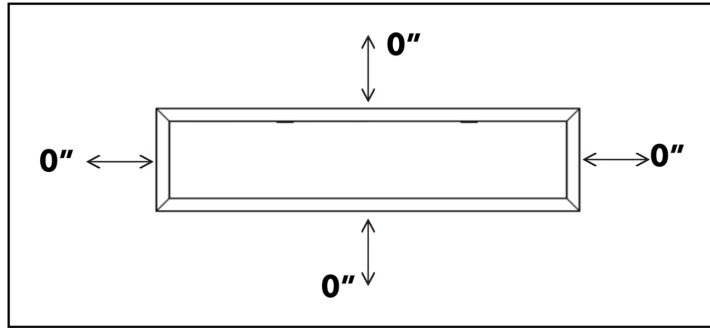

Front View




Side View

Minimum Clearances to Combustibles	
Top	0"
Sides	0"
Back	0"
Bottom	0"
Front	36" / 0.9m

- No clearance requirements on top, bottom, left, and right sides of the fireplace in 1-sided, 2-sided, or 3-sided configuration
- Keep furniture, drapery or items at least 3 ft / 0.9m away from the front of the fireplace

### Framing

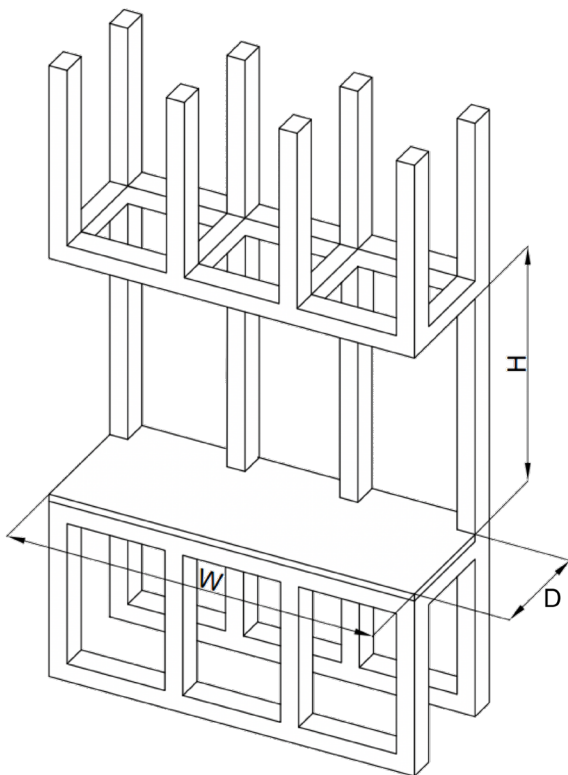

#### Framing Dimensions

W	H	Depth
1010 mm	643 mm	320 mm
39 3/4 in.	25 3/8 in.	12 1/2 in.

Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury



Dynasty Fireplaces  
 3231 No. 6 Road, Unit 127  
 Richmond, BC V6V 1P6 Canada  
 +1 877-521-1009 | 604-821-1009 | support@dynastyfireplaces.com  
 Visit Us: [dynastyfireplaces.com](http://dynastyfireplaces.com)

