

Assembly Instruction Sheet #IS-AME5005IB For Style AME5005IB

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Bulb Recommended: (5) Candelabra Base 60W Maximum

Estimated Assembly Time: 30-45 minutes


Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

▲ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

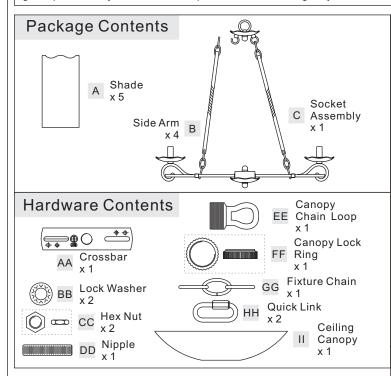

Place another Lock Washer (BB) over the Nipple (DD) and then thread the Nipple (DD) into the Crossbar (AA) until the Nipple (DD) is about 0.375" above the Crossbar (AA).

C. Remove the Canopy Lock
Ring (FF) from the Canopy
Chain Loop (EE). Place
the Ceiling Canopy (II)
over the Canopy Chain
Loop (EE) against the
ceiling to determine the
correct position of the
Nipple (DD). Thread the
Canopy Lock Ring onto
the Canopy Chain Loop
(EE). Adjust the Nipple
(DD) to allow the Ceiling
Canopy (II) to rest against




the ceiling when held in place by the Canopy Lock Ring (FF).

D. Remove the Canopy Lock Ring (FF) and the Ceiling Canopy (II).

Tighten the Hex Nut (CC) against the Crossbar (AA) to secure in place.


STEP 1 - Install Crossbar

A. Attach the Crossbar (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.



STEP 3 - Attach Side Arms

A. Attach Side Arms (B) to the Hooks on the side of the fixture canopy as shown



STEP 2 - Install Canopy Chain Loop and Nipple

- * Pliers is required for this step.
- A. Thread one Hex Nut (CC) to one end of the Nipple (DD) until it is at least 0.25" from the end. Pass one Lock Washer (BB) over the end of the Nipple (DD) and thread the Canopy Chain Loop (EE) onto the Nipple (DD). By using pliers, thread the Hex Nut (CC) against the Canopy Chain Loop (EE) and hand tighten until snug.
- B. Thread another Hex Nut (CC) to the middle of the Nipple (DD).

STEP 4 - Install Fixture Chain and Ceiling Canopy

- A. Adjust the Fixture Chain (GG) to your desired length by removing the links if needed.
 - * Pliers is required for this step.
- B. With the Fixture Chain (GG) not attached to the Fixture Loop (A) and the Canopy Chain Loop (EE), pull the supply wires through the Fixture Chain (GG) alternating links. After the wires are through the Fixture Chain (GG), pull the Supply Wires and the Ground Wire

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700

or visit us on-line at www.quoizel.com

August2014

through the Canopy Lock Ring (FF) and the Ceiling Canopy (II) in order.

C. Attach one end of the Fixture
Chain (GG) to the Fixture Loop
(A) with one Quick Link (HH). Lift
the fixture and Fixture Chain (GG)
up And Attach the other end of the
Fixture Chain (GG) onto the
Canopy Chain Loop (EE) with
another Quick Link (HH). The
fixture will now hang safely. Close
the chain loop at the Ceiling
Canopy Loop (EE).

D. Feed the Supply Wires and Ground Wire through the Canopy Chain Loop (EE) and Nipple (DD) into the Outlet Box. Cut the wires leaving approximately 8" of wire extending from the Outlet Box.

E. Refer to Step 5 for wire connections.

F. Raise the Ceiling Canopy (II) and Canopy Lock Ring (FF) up the Fixture Chain (GG) and over the Canopy Chain Loop (EE). Tighten the Canopy Lock Ring (FF) onto the Canopy Chain Loop (EE) until tight.

Suggested chain length for Ceiling height:

8' ceiling: use 7 links of chain and

2 quick links

9' ceiling : use 18 links of chain

and 2 quick links

10' ceiling: use 29 links of chain

and 2 quick links

Supply Wires and Ground Wire GG HH Fixture Loop

AME5005IB FINISH: IMPERIAL BRONZE T77.5" OVERALL HEIGHT (INCLUDES 48" CHAIN AND 2 QUICK LINKS) AME5005IB NOTE: TWO LIGHTS SHOWN FOR ILLUSTRATION PURPOSES ONLY. 77.5" OVERALL HEIGHT (INCLUDES 48" CHAIN AND 2 QUICK LINKS)



(Not Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2''


 NO.
 PART NUMBER REPLACEMENT PART
 REQ.

 1
 M393CHIB
 CHAIN
 1

 2
 G3905SH
 SHADE
 5

STEP 5 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.



STEP 6 - Install Shade and Bulb

- A. Place the Shade (A) over the socket. Seat the Shade (A) onto the Cup.
- B. This fixture uses candelabra bulb with standard screw base. Maximum 60 watts. Insert bulb and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!

