+1 850 296 2377 Working hours : Mon - Fri 9:00 a.m. - 16:00 p.m. EST

Item Number: A03887


WARNING (To reduce the risk of fire, electric shock, or personal injury):

- 1. We suggest installation by a **licensed electrician**.
- 2. Please read the instruction carefully and save it as you may need it at a later time.
- Before you start, NEVER attempt any work without shutting off the electricity until the work is done.
 A) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.

B) Place the wall switch in the "**OFF**" position.

- 4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
- 5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
- 6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
- 7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
- 8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- 9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

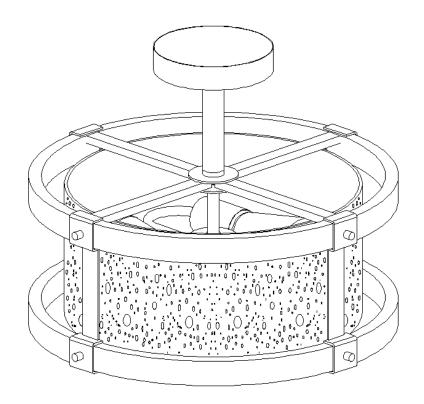

TOOLS REQUIRED (NOT INCLUDED):

Before starting assembly and installation please prepare the needed tools as below picture

ASSEMBLY & INSTALLATION INSTRUCTIONS:


- 1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.
- 2. Turn off power

Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.

A) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.

B) Place the wall switch in the "OFF" position.

3. Unscrew knob nuts (F) from mounting plate (B).



4. Pass the fixture wires through stem (G) and canopy (E), then screw stem (G) onto canopy (E) and fixture body (H).

Attach mounting plate (B) to the outlet box with mounting screws (D). 5.

6. Make wire connections

Connect wires as below wires connection shown. PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.

Connect Black or

Black

Red Supply Wire to:

*Parallel cord (round & smooth)

Clear.Brown.Gold or Black


Connect ground wires according to the below chart

without tracer with tracer GROUND GROUND Insulated wire (other than green) Insulated wire (other than green) with copper conductor with silver conductor CUPPED *Note: When parallel wires (SPT I & SPT II) DIMPLES WASHER are used. The neutral wire is square shaped or ridged and the other wire will be round in GREEN GROUND GREEN GROUND Neutral Wire shape or smooth (see illus.) SCREW SCREW Twist wires together with plastic wire connector until tightly joined, and wrap each connector with approved

electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

- 7. Raise canopy (E) to the ceiling and secure canopy (E) in place by
- tightening knob nuts (F) onto the pre-assembled threaded nipples on mounting plate (B).

Note: canopy (E) should be snug against the ceiling and knob nuts (F). If not, adjust the length of the pre-assembled threaded nipples on mounting plate assembly (B) by unscrewing the pre-assembled hex nuts and then screwing threaded nipples in or out of mounting plate (B) until the length is achieved. Tighten the hex nuts and back to step 7.



OUTLET BOX B

D

Connect


White Supply Wire to:

*Parallel cord (square & ridged)


Clear, Brown, Gold or Black


White





homecustomercare@outlook.com





Connect wires according to the below chart

Install bulbs (not included) (Please do not exceed the maximum wattage recommended on the socket.) Screw tube (J) onto sockets assembly (I), then insert glass shade (K), plastic washer (L), iron plate (M) into tube (J) and secure with hex nut (N).

9. Place lid (O) on tube (J) and secure with nut (P).


10. Check everything is already installed properly, then you could turn on the light. Enjoy!

CLEANING

To clean, wipe the fixture with a soft cloth. Clean glass with a mild cleaner (such as mild and non-abrasive soap.) Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.



 \square