

IMPORTANT SAFETY INSTRUCTIONS

When using electrical products, basic precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- Do not use these products outdoors unless marked suitable for indoor and outdoor use. When products are used in outdoor applications, connect the product to a Ground Fault Circuit Interrupting (GFCI) outlet. If one is not provided, contact a qualified electrician for proper installation.
- Do not mount or place near gas or electric heaters, fireplace, candles or other similar sources of heat.
- Do not secure the wiring of the product with staples or nails, or place on sharp hooks or nails. Install only as per instructions.
- Do not let lamps rest on the supply cord or on any wire.
- Do not use this product for other than its intended use.
- Do not hang objects from cord, wire, or light string.
- Do not close doors or windows on the product or extension cords as this may damage the wire insulation.
- Do not cover the product with cloth, paper or any material not part of the product when in use.
- This product has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not use with an extension cord unless plug can be fully inserted. Do not alter or replace the plug.
- Read and follow all instructions that are on the product or provided with the product.

SAVE THESE INSTRUCTIONS.

CAUTION

- To reduce the risk of fire, use only with type S lamps, 432 watts maximum.



GENERAL INSTRUCTIONS

- These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with these instructions and current electrical codes, local standards and regulations.
- Can be used in dry, damp and wet locations.
- **Risk of electric shock.** Avoid making connections or disconnections when the equipment is wet. Do not use with extension cord near water or where water may accumulate. Do not submerge in water. Keep at least 16ft / 4.9m from pools and spas.

- Commercial grade string light is intended for installation indoors or outdoors.
- String lights must be supported by steel guide cables or other suitable supporting hardware such as s-hooks, zip ties or bolts (not included). Proper diameter cabling must be used for the maximum span distance between supports according to local building codes. See installation instructions for details.
- Light sockets must be installed base up so that bulbs are facing down ONLY.
- Do not cluster the bulbs.
- Not intended for installation in ceilings, soffits, cabinets or other enclosed spaces.
- Periodically inspect wire and sockets for degradation due to weather, UV light or other damage. Discontinue use of worn out light string.

WARNING

Risk of electric shock.

Disconnect power at source before wiring, replacing light bulbs, connecting multiple sets or servicing in any way.


For string light sets installed outdoors, do not replace light bulbs or connect multiple sets during rain or wet weather – replace light bulbs / connect multiple sets only during dry and calm weather.

REPLACING LIGHT BULBS


- 1) Unscrew existing light bulb by twisting counterclockwise. Dispose of light bulb in appropriate manner.
- 2) Replace with E26 medium base light bulbs by screwing bulb into socket clockwise until the top of socket forms a tight seal around the bulb – this prevents moisture from getting into socket.
- 3) Do not exceed 432 watts all sets combined. See chart.

CONNECTING MULTIPLE SETS

- 1) Remove end cap to expose female connector on original LED light string set.

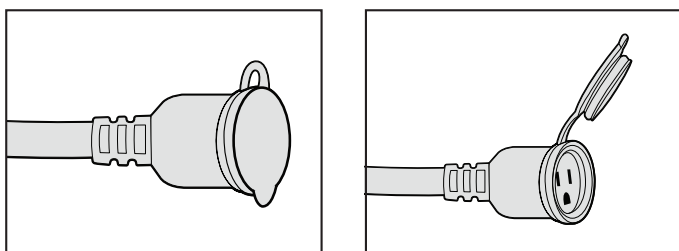

- 2) Connect male end of additional set to female end of original set – ensure that the plug is fully inserted to create a weatherproof seal.

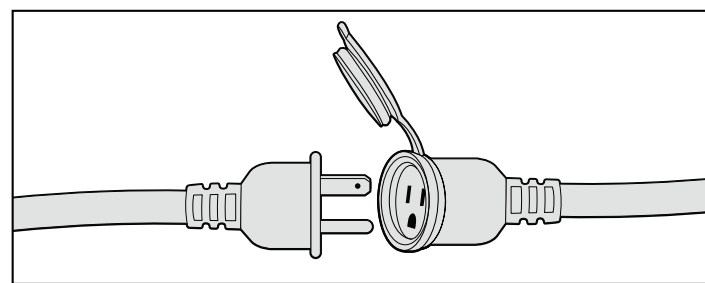

- 3) Do not exceed 432 watts all sets combined. See chart below:

PPSL24 - 24' LED String Light


MAXIMUM WATTAGE PER BULB	NUMBER OF LIGHT SETS
2w OR LESS	18
3w	12
4w	9
5-6w	6
7-9w	4
10-12w	3
13-18w	2
19-35w	1

PPSL48 - 48' LED String Light


MAXIMUM WATTAGE PER BULB	NUMBER OF LIGHT SETS
2w OR LESS	9
3w	6
4w	4
5-6w	3
7-9w	2
10-17w	1

INSTALLATION INSTRUCTIONS

- 1) Attach using a guide wire with s-hooks or zip ties (not included).

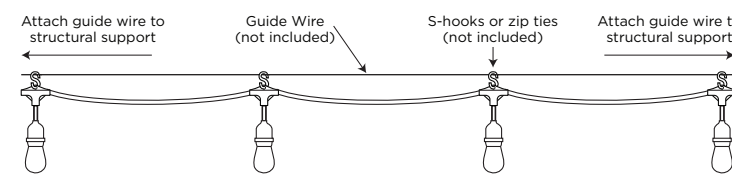

- 2) Attach directly to structural support minimum every 24 ft. / 7.3m using hardware (not included).

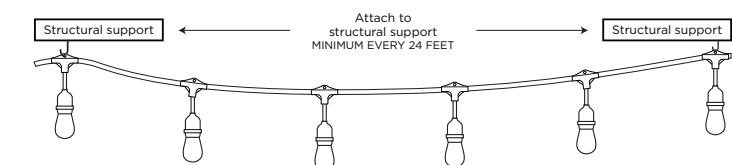

NOTE

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This lighting equipment complies with CAN ICES-005 (B).

WARRANTY

This product has a 2 year warranty. Should this product not last 2 years, Conglom will send you, at its election, a replacement product or refund your original purchase price. Please call our toll-free number 1-877-333-0098 (Monday to Friday, 8:30 am to 5:00 pm EST) or send an email to led@conglom.com for instructions on product replacement. Please make sure to have register receipt and proof of purchase (barcode) from this package on hand when contacting Conglom Customer Service team.

PPSL24B / PPSL48B
LED STRING LIGHTS
GUIRLANDE LUMINEUSE DEL
SERIE DE LUCES LED

St-Laurent, Québec H4S 2C3
www.conglom.com
Made in China
Fabrique en Chine
Hecho en China



Conglom
St-Laurent, Québec H4S 2C3
www.conglom.com
Made in China

